



7/8 Corrugated Roof or Wall Panel

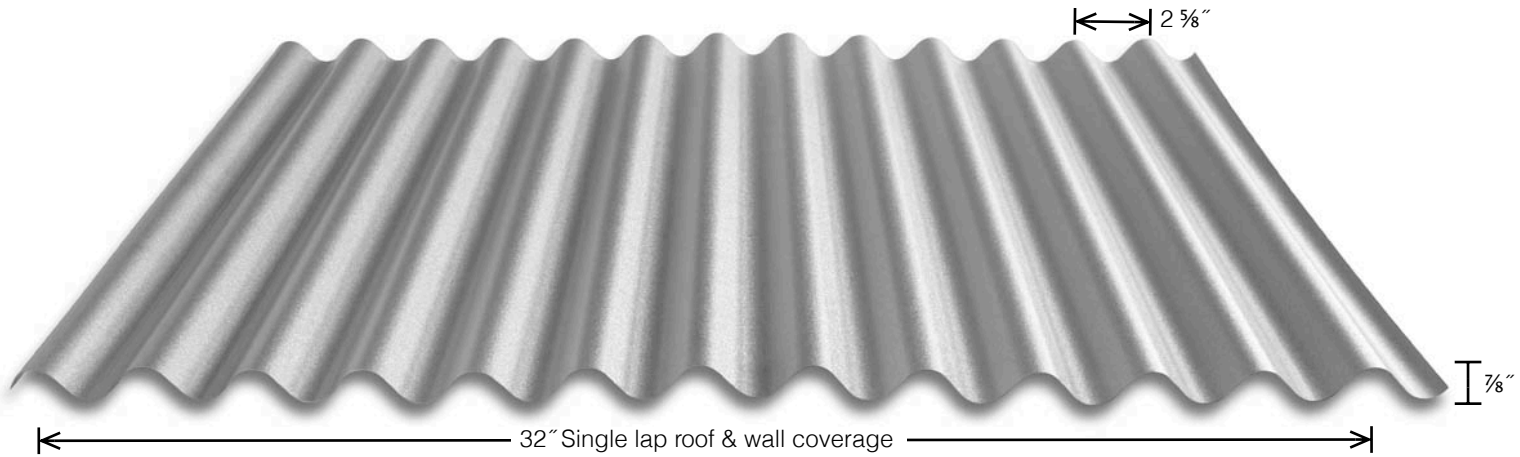

Roof

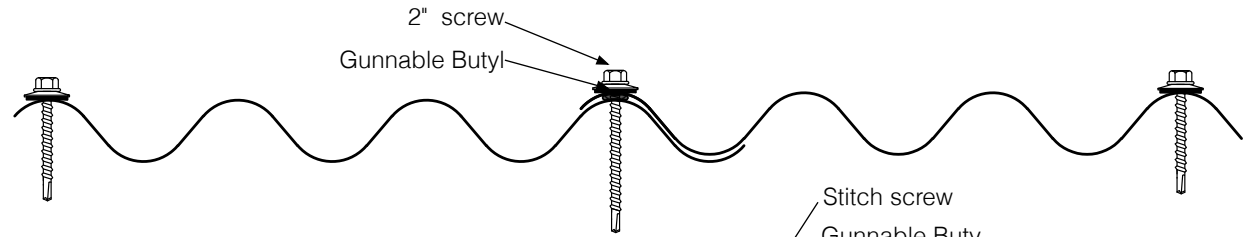

Wall



- 26, 24 & 22 gauge Tru-Gauge™ and .032 Aluminum
- Unique design only requires single lap for roof applications
- ASTM 653 & 792
- Custom lengths 1' to 35'-No short length cut charge
For longer lengths please inquire
- Recommended minimum pitch 3:12
- Long length flashings available up to 21'
- Fiberglass panels available to match profile
- Panel is available in a wide variety of "Cool" baked on ARMORTECH™ or "Cool" baked on Kynar® colors.
22 gauge Non-Galv. (cold rolled), 22 gauge Weathering Steel (A606) Bonderized and .032 Aluminum
- Color matched neoprene washered screws



| Allowable Live Load in PSF | | | Span in feet (steel only) | | | | |
|----------------------------|-------|-----|---------------------------|-------|-----|-------|-----|
| SPAN TYPE | GAUGE | KSI | 2' | 2' 6" | 3' | 3' 6" | 4' |
| SINGLE SPAN | 22 | 50 | 505 | 323 | 224 | 164 | 125 |
| DOUBLE SPAN | 22 | 50 | 485 | 315 | 220 | 162 | 124 |
| THREE OR MORE SPANS | 22 | 50 | 597 | 389 | 273 | 202 | 155 |
| SINGLE SPAN | 24 | 50 | 383 | 245 | 170 | 125 | 95 |
| DOUBLE SPAN | 24 | 50 | 368 | 239 | 167 | 123 | 94 |
| THREE OR MORE SPANS | 24 | 50 | 452 | 295 | 207 | 153 | 118 |
| SINGLE SPAN | 26 | 80 | 310 | 219 | 151 | 101 | 64 |
| DOUBLE SPAN | 26 | 80 | 301 | 210 | 135 | 90 | 54 |
| THREE OR MORE SPANS | 26 | 80 | 368 | 253 | 172 | 110 | 67 |

MATERIAL SPECIFICATIONS

- 24 gauge Kynar 500® Painted Steel .0236" (thickness prior to painting) G-90 Galvanized or AZ-50
- 22 & 24 gauge bare Zinalume® Plus with Clear Acrylic Coating-AZ-55
- ▲ 22 gauge Kynar 500® painted Steel .029" (thickness prior to painting) G-90 Galvanized or AZ-50
- 22 gauge (Cold Rolled)
- 22 gauge A606
- 24 gauge Bonderized (G-90)
- Kynar® and substrate testing data available (See website)

KEY FEATURES

- 19 Standard Colors, 5 Metallic Colors and 4 Specialized Colors
- Kynar 500® Paint System-the ultimate in exterior durability and color retention
- "Cool" color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior quality, two-coat, 70% resin finish, applied at a 1 mil. thickness
- 20 and 30 year commercial paint warranty:
(Contact TMP for warranty specifications)

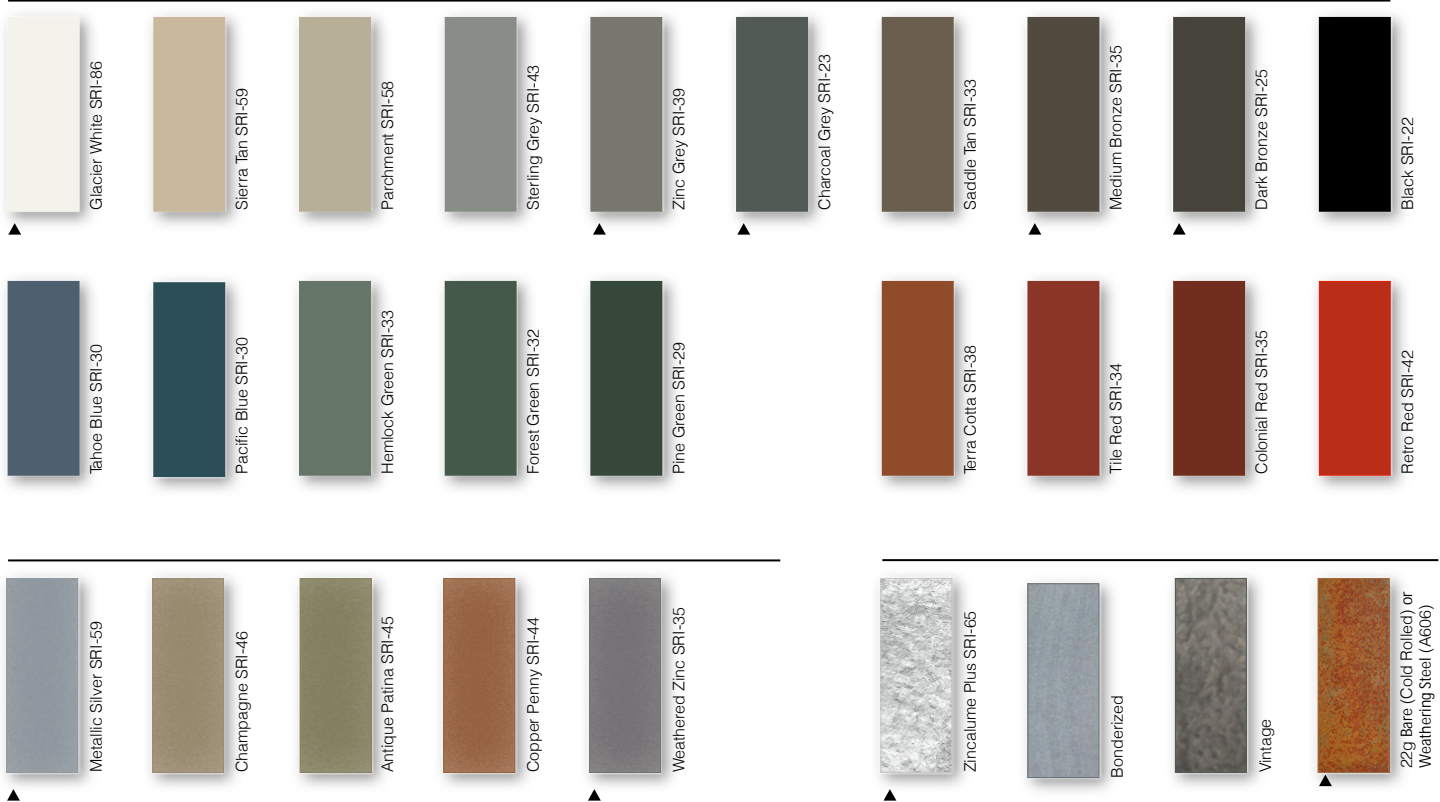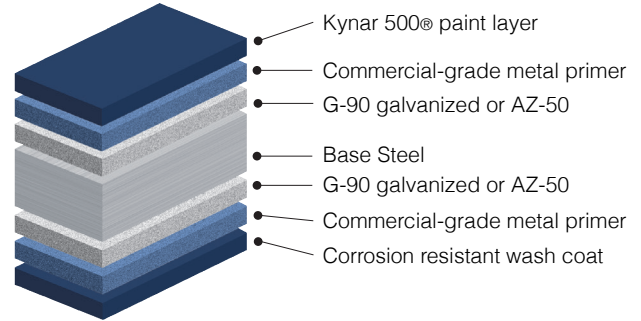

These printed chips provide a close representation of the colors. Metal samples are available upon request.

Coatings are low gloss 10-15% sheen

****Oil canning is not a cause for material rejection****

| Standard Panels | | | |
|-----------------|-------|----------|--------|
| Gauge | Color | LBS SQFT | LBS LF |
| 24 | All | 1.22 | 4.84 |
| 22 | ▲ | 1.53 | 4.84 |

