



V-Rib


ROOF AND WALL

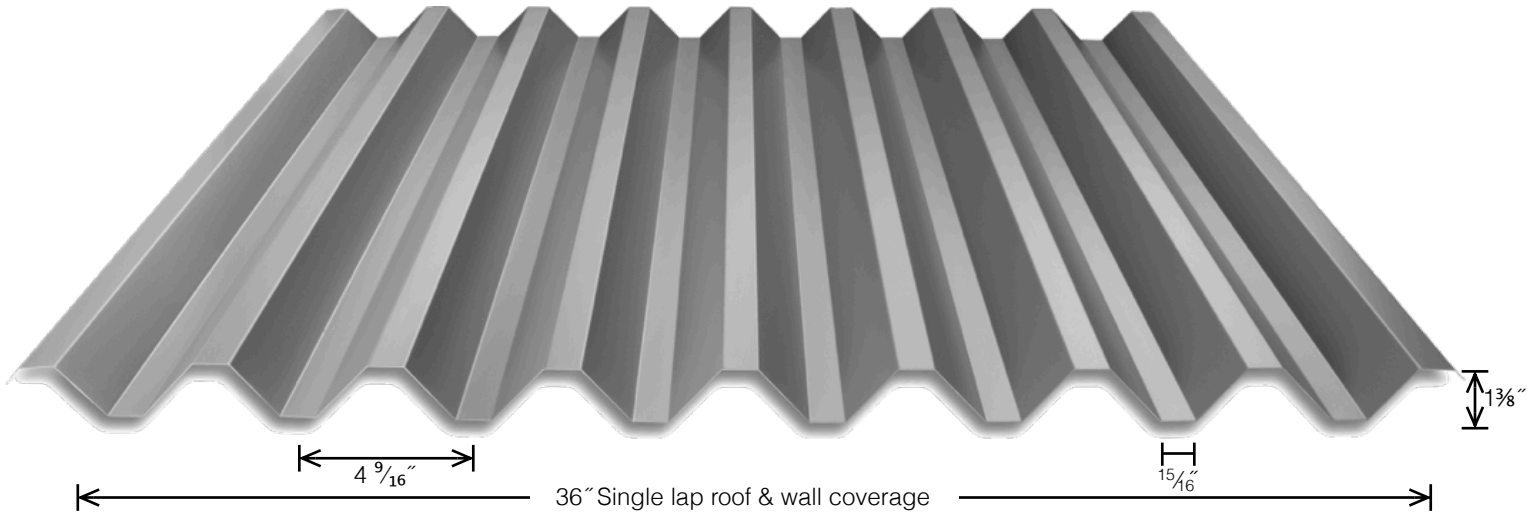


Lap Detail

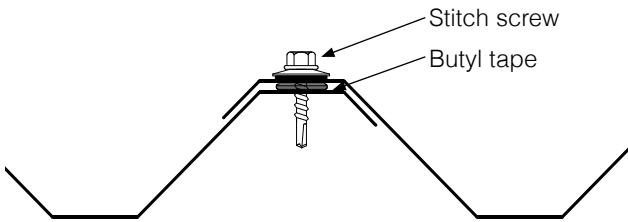

V Rib



V Rib Reversed



KEY FEATURES

- 24g, 22g Tru-Gauge™
- ASTM 283, 330 and 331
- Structural Panel that will span up to 6'
- Recommended minimum pitch 3:12
- Custom lengths 5' to 21'
- Long length flashings available up to 21'
- Panel is available in a wide variety of "Cool" baked on Kynar® colors. 22 gauge Non-Galv. (cold rolled), 22 gauge Weathering Steel (A606) and 24ga Bonderized (G-90)
- Easy-to-order standard and custom made trim and accessory packages available for specific project needs
- Color matched Neoprene Washered screws

Allowable Live Load in PSF

Span in feet (steel only)

SPAN TYPE	GAUGE	KSI	2'	2' 6"	3'	4'	5'	6'
SINGLE SPAN	22	50	806	516	358	202	129	90
DOUBLE SPAN	22	50	806	516	358	202	129	90
THREE OR MORE SPAN	22	50	1008	645	448	252	161	112
SINGLE SPAN	24	50	636	407	283	159	102	71
DOUBLE SPAN	24	50	627	401	348	157	100	70
THREE OR MORE SPAN	24	50	784	502	358	196	125	87
SINGLE SPAN	26	80	545	349	242	136	87	61
DOUBLE SPAN	26	80	514	329	229	129	82	57
THREE OR MORE SPAN	26	80	643	411	286	161	103	71