



1/2" Corrugated Roof & Wall Panel Technical Data Resource

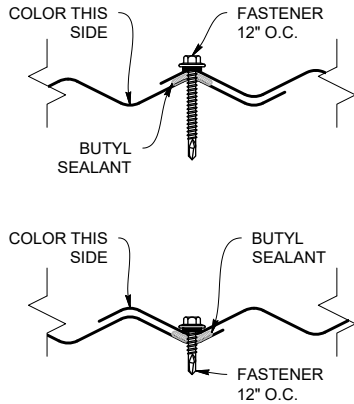

ROOF OR WALL PROFILE



KEY FEATURES

- 29, 26, 24 and 22 Tru-Gauge™ and .032" and .040" Aluminum
- 22ga Weathering Steel (A606)
- 3:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 1' to 30'
(For longer length panels, please inquire)
- Long length flashings available up to 20' 11"
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Perforated options available (please inquire)
- Fiberglass panels available in white, 24" wide, 12' length
- Manufactured in Salem OR
- OverEZee™ Retro-fit systems available

TESTING

- ASTM A653/A924 - G90 Galvanized
- ASTM A792 - Zincalume/Galvalume AZ-50/55
- ASTM E1680 - Air infiltration (roof)
- ASTM E1646 - Water infiltration (roof)
- ASTM E331 - Water infiltration (wall)
- ASTM E283 - Air infiltration (wall)
- ASTM A653/A924 - G90 Galvanized
- ASTM A792 - Zincalume/Galvalume AZ-50/55

Gauge	Color	Panel Width
29ga	Bare Galvanized/AZ50	24" (Oregon only)
29ga	Painted	34-5/8"
26ga, 24ga, 22ga	Painted	37-1/4"
.032, .040 Aluminum	Painted	37-1/4"

WEIGHT CHART

MAX CORR	WIDTH	29 GA STEEL	26 GA STEEL	24 GA STEEL	22 GA STEEL	.032 ALUM	.040 ALUM
THICKNESS		0.0136"	0.019"	0.0236"	0.0285"	0.032"	0.040"
WEIGHT/LINFT	37-1/4"	1.896 LBS	2.777 LBS	3.505 LBS	4.233 LBS	1.661 LBS	2.076 LBS
WEIGHT/SQFT	37-1/4"	0.657 LBS	0.895 LBS	1.129 LBS	1.364 LBS	0.535 LBS	0.669 LBS

ASTM E 1680/E283 Air Penetration	ASTM E 1646/E331 Water Penetration
25 PSF < 0.01 CFM/ft ² -PASS	50 PSF - Pass